

# Technical Data Sheet



## Catalog No. N48SF2Y-15

Characteristics	
Phase	3
KVA	15
Primary	480Δ
Secondary	208Y/120
Conductor	Aluminum
Temp. Rise	115° C
Frequency	60 HZ
Taps	-2@5%
ESS	Yes
Insulation	180° C
Weathershield	N/A
Wall Bracket	Built-In
Weight (lbs)	435
Sound(dB)	45

**Notes**



All units are UL listed and are designed in accordance with applicable NEMA, ANSI and IEEE standards.

Transformers are dry-type AA, non-ventilated NEMA 3R enclosure


Transformers are wall mounted. Wall mounting bracket is built into the enclosure.

Paint color is ANSI 61.


AMP Ratings	
<b>Line In (Primary) @ 480V</b>	<b>18.0A</b>
<b>Load (Secondary) @ 208V</b>	<b>41.6 A</b>

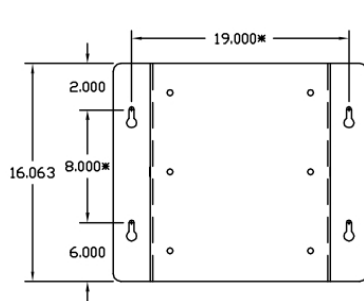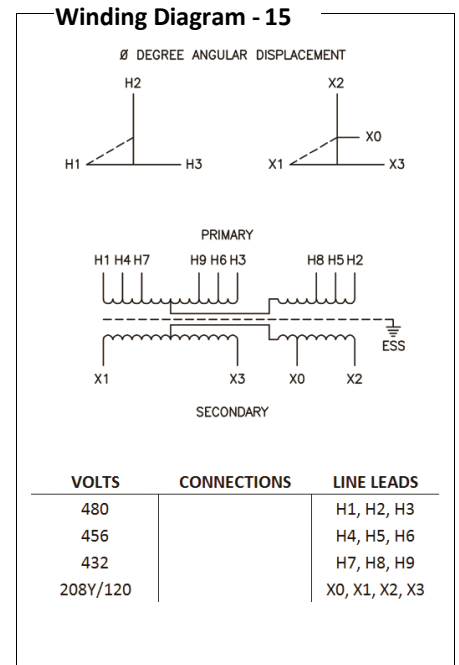


BACK VIEW



SIDE VIEW



FRONT VIEW



Outline No: 08A7635