

# Technical Data Sheet



## Catalog No. P20LF21-5

Characteristics	
Phase	1
KVA	5
Primary	208V
Secondary	120/240V
Conductor	Aluminum
Temp. Rise	115° C
Frequency	60 HZ
Taps	-2@5%
ESS	No
Insulation	180° C
Weathershield	N/A
Wall Bracket	Built-In
Weight(lbs)	110
Sound(dB)	40

**Notes**

All units are UL listed and are designed in accordance with applicable NEMA, ANSI and IEEE standards.



Transformers are dry-type AA, non-ventilated NEMA 3R enclosure.

Transformers are wall mounted. Wall mounting bracket is built into the enclosure.

Paint color is ANSI 61.

**AMP Ratings**

<b>Line In (Primary) @ 208V</b>	24.0A
<b>Load (Secondary) @ 120V</b>	41.7A
<b>Load (Secondary) @ 240V</b>	20.8A

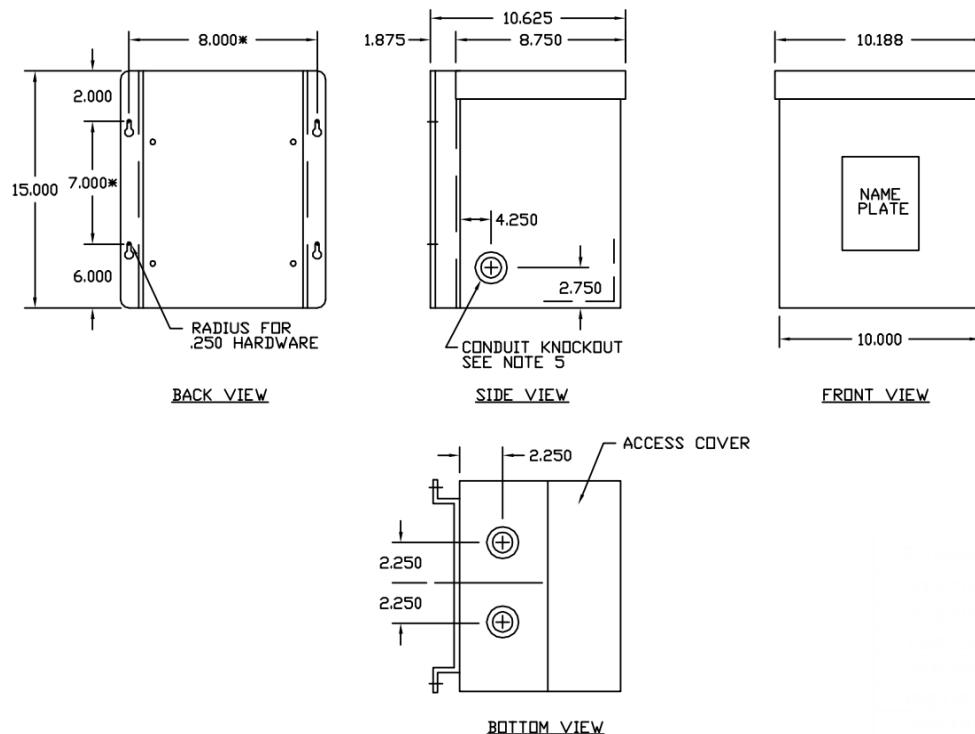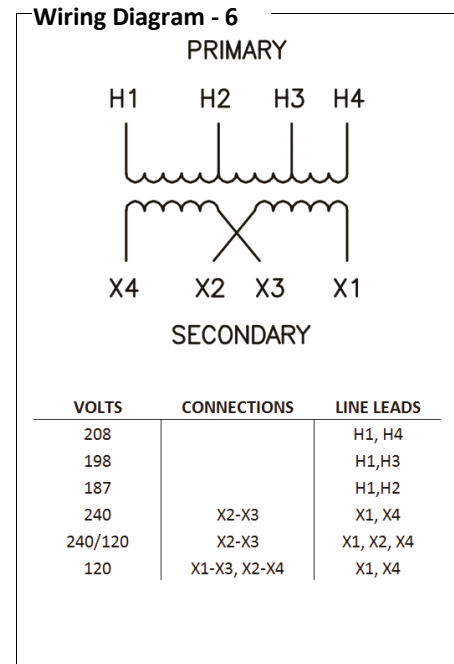

Outline No: 05A1465