


Typical Performance Technical Data Sheet



Catalog No. T48SF2D-15


Characteristics	
Phase	3
KVA	15
Primary	480Δ
Secondary	240Δ/120LT
Conductor	Aluminum
Temp. Rise	115° C
Frequency	60 HZ
Taps	+2, -4 x 2.5%
ESS	Yes
Insulation	220° C
Weathershield	WS-2
Wall Bracket	WMB-3
Weight (lbs)	245
Sound (dB)	45

Typical Performance @ 135° C	
Regulation @ 100% PF	3.6%
Regulation @ 80% PF	3.9%
Impedance	4.0%
No Load Losses (W)	49
Full Load Losses (W)	534

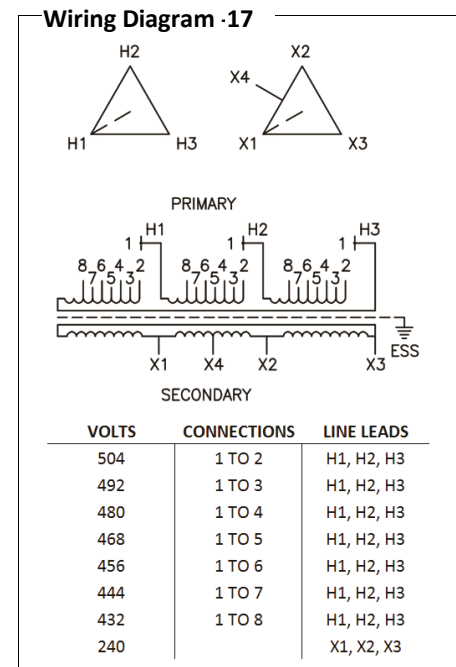

Notes

All units are UL listed and are designed in accordance with applicable NEMA, ANSI and IEEE standards.
Transformers are dry-type AA, ventilated NEMA 2 enclosure.
If a weathershield is indicated above this transformer can be converted to a NEMA 3R enclosure.
Transformers are floor mounted. Wall mounting bracket kit if shown above is optional and is supplied as a separate accessory.
Paint color is ANSI 61.

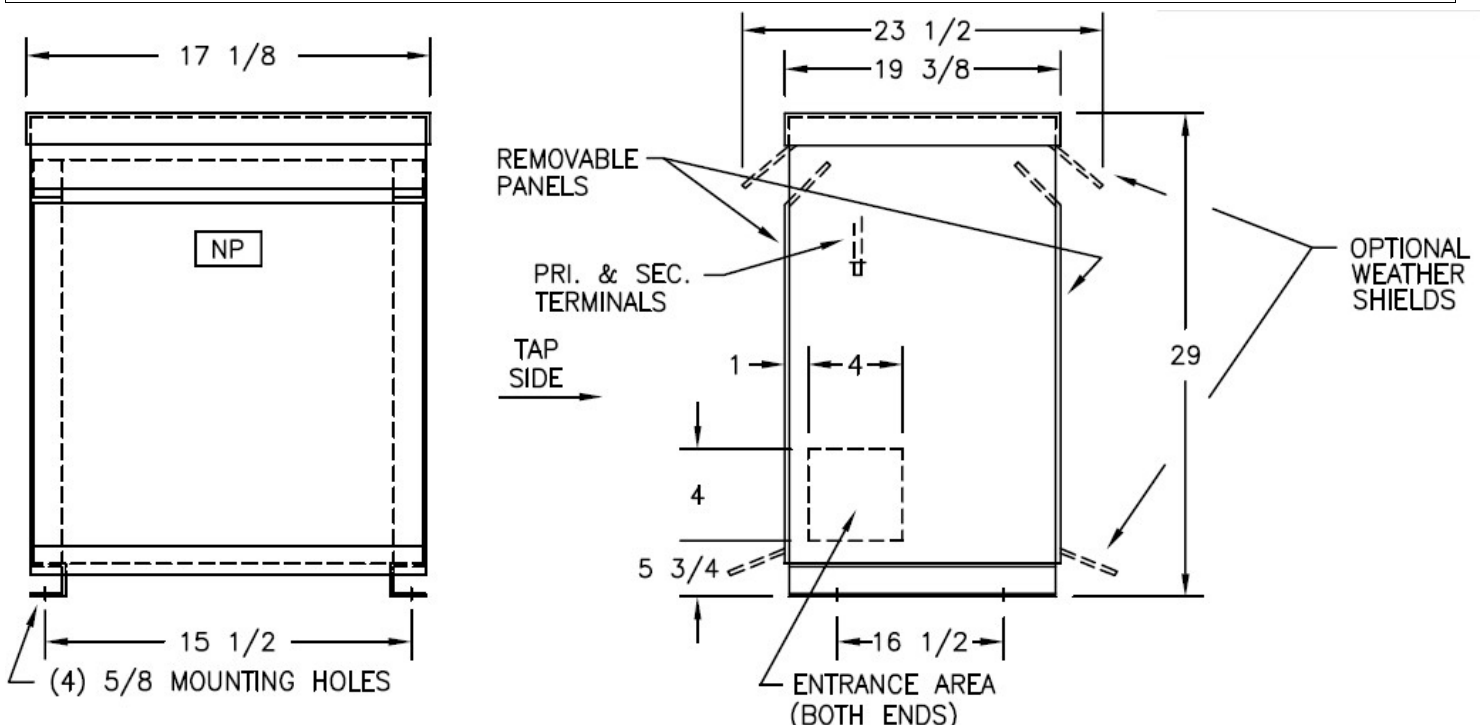

Outline No: 08A3221