

Technical Data Sheet



Catalog No. N24SF2Y-9

Characteristics

Phase	3
KVA	9
Primary	240Δ
Secondary	208Y/120
Conductor	Aluminum
Temp. Rise	115° C
Frequency	60 HZ
Taps	-2@5%
ESS	Yes
Insulation	180° C
Weathershield	N/A
Wall Bracket	Built-In
Weight (lbs)	270
Sound(dB)	40

Notes

All units are UL listed and are designed in accordance with applicable NEMA, ANSI and IEEE standards.

Transformers are dry-type AA, non-ventilated NEMA 3R enclosure


Transformers are wall mounted. Wall mounting bracket is built into the enclosure.

Paint color is ANSI 61.


AMP Ratings

Line In (Primary) @ 240V	21.7 A
Load (Secondary) @ 208V	25.0 A


Winding Diagram - 12

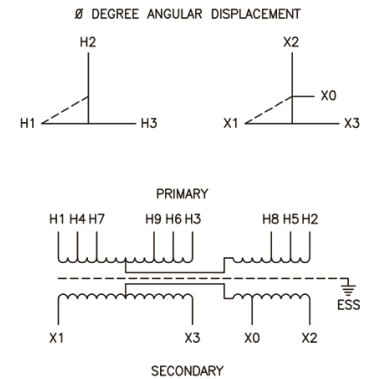


VOLTS	CONNECTIONS	LINE LEADS
240		H1, H2, H3
228		H4, H5, H6
216		H7, H8, H9
208Y/120		X0, X1, X2, X3

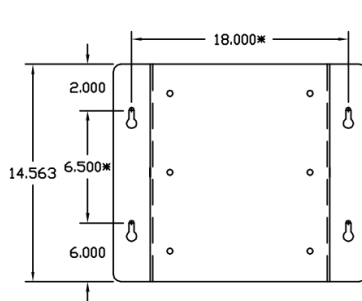


BACK VIEW

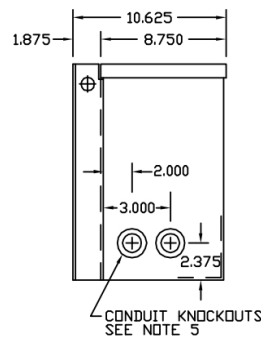

SIDE VIEW

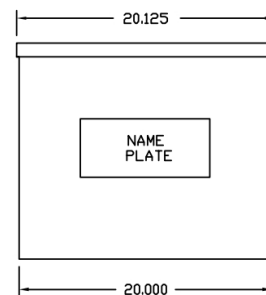

FRONT VIEW

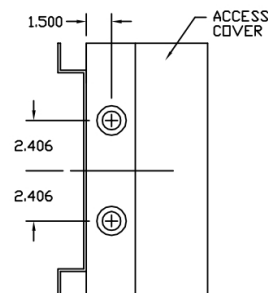

Outline No: 08A7634