

Technical Data Sheet



Catalog No. N48SF2D-15

Characteristics	
Phase	3
KVA	15
Primary	480Δ
Secondary	240Δ
Conductor	Aluminum
Temp. Rise	115° C
Frequency	60 HZ
Taps	-2@5%
ESS	Yes
Insulation	180° C
Weathershield	N/A
Wall Bracket	Built-In
Weight (lbs)	435
Sound(dB)	45

Notes

All units are UL listed and are designed in accordance with applicable NEMA, ANSI and IEEE standards.



Transformers are dry-type AA, non-ventilated NEMA 3R enclosure

Transformers are wall mounted. Wall mounting bracket is built into the enclosure.


Paint color is ANSI 61.

AMP Ratings


Line In (Primary) @ 480V	18.0A
Load (Secondary) @ 240V	36.1 A

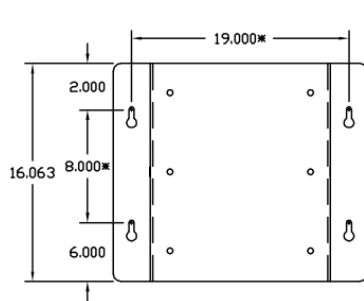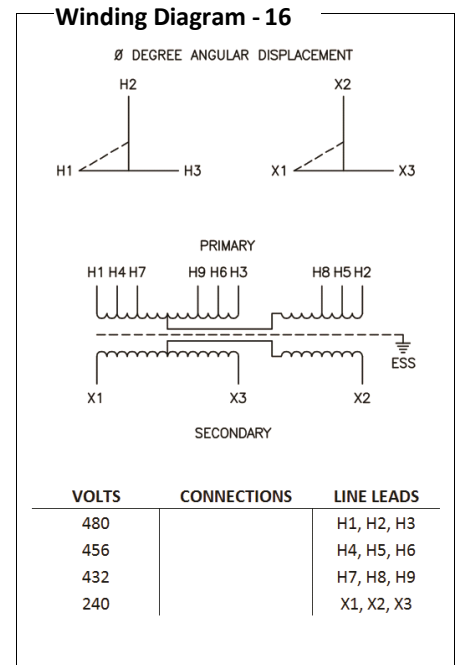


BACK VIEW



SIDE VIEW



FRONT VIEW



Outline No: 08A7635