

Typical Performance Technical Data Sheet



Catalog No. T48LB40-150

Characteristics	
Phase	3
KVA	150
Primary	480Δ
Secondary	400Y/230
Conductor	Aluminum
Temp. Rise	80° C
Frequency	60 HZ
Taps	+2, -4 x 2.5%
ESS	No
Insulation	220° C
Weathershield	WS-12A
Wall Bracket	NONE
Weight (lbs)	1520
Sound (dB)	50

Typical Performance @ 100° C	
Regulation @ 100% PF	1.0%
Regulation @ 80% PF	2.3%
Impedance	2.7%
No Load Losses (W)	335
Full Load Losses (W)	1,612


Wiring Diagram - 27A

VOLTS	CONNECTIONS	LINE LEADS
504	2 TO 3	H1, H2, H3
492	2 TO 5	H1, H2, H3
480	3 TO 4	H1, H2, H3
468	4 TO 5	H1, H2, H3
456	5 TO 6	H1, H2, H3
444	4 TO 7	H1, H2, H3
432	6 TO 7	H1, H2, H3
400Y/230		X0, X1, X2, X3

AMP Ratings	
Line In (Primary) @ 480V	180 A
Load (Secondary) @ 400V	217 A

Notes

All units are UL listed and are designed in accordance with applicable NEMA, ANSI and IEEE standards. Transformers are dry-type AA, ventilated NEMA 2 enclosure. If a weathershield is indicated above this transformer can be converted to a NEMA 3R enclosure. Transformers are floor mounted. Wall mounting bracket kit if shown above is optional and is supplied as a separate accessory. Paint color is ANSI 61.

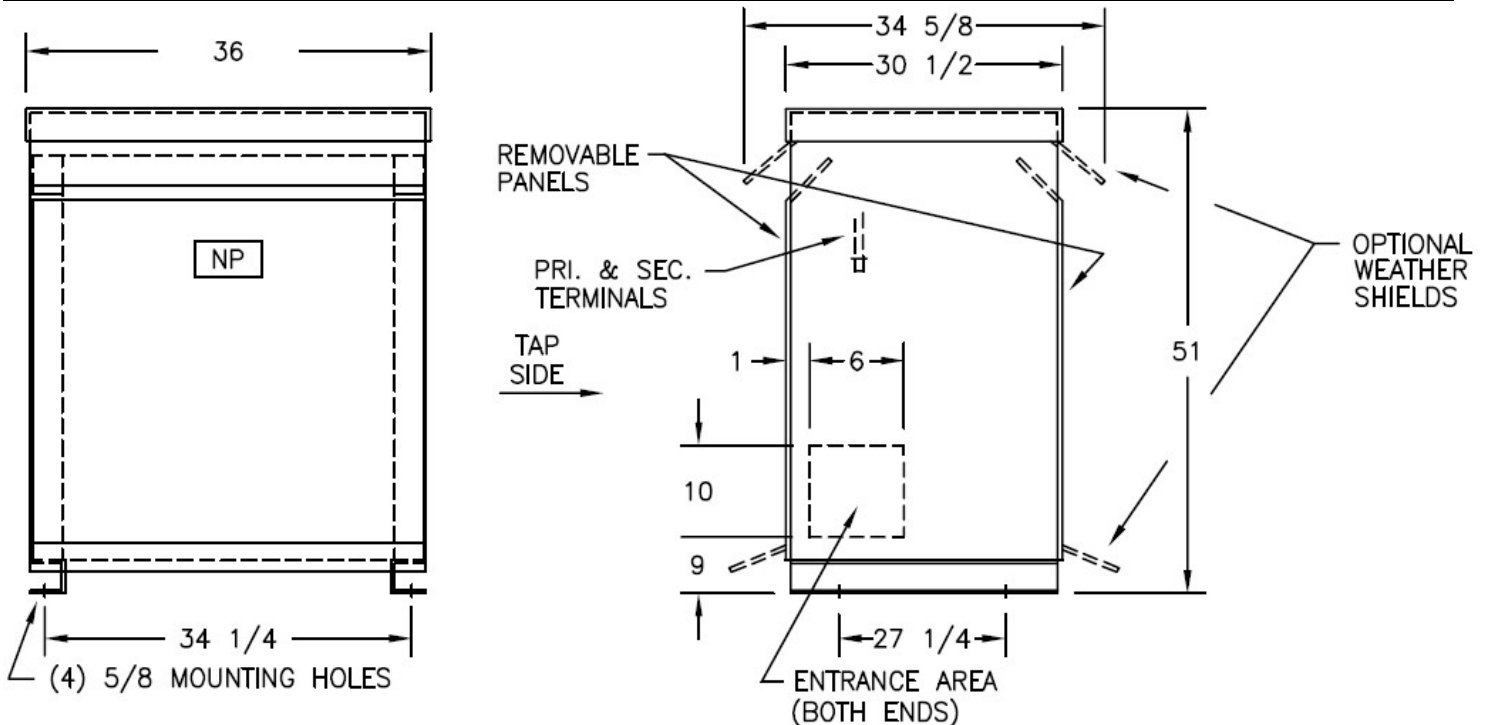

Outline No: 08A6315